




Küba DE *professional*

Powerful ceiling mounted air cooler for commercial applications

Küba DE *professional*

Powerful ceiling mounted air cooler for commercial applications

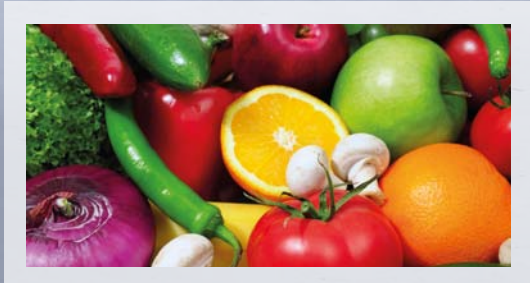

Optimal utilisation of space



Standard version has drip tray hinging down



Large cooling power range

Type designation code

1 2 3 4 5 6

DE A E 07 1 D


- 1 Model range designation
- 2 Fin spacing
- 3 Electric defrost
- 4 Size
- 5 Number of fans
- 6 Generation Code



Capacity range (for SC2)



Temperature range (t_{L1})



Number of fans



Content

Application benefits for contractors and operators 4
 Basic version 6
 Technical data – DEA(E) 8
 Technical data – DEB(E)..... 8
 Dimensions, weights, electric defrost, drain..... 9
 Variants 10
 Accessories 11



Applications

- ➔ Commercial applications
- ➔ Small rooms and low ceilings
- ➔ Open sales areas
- ➔ Low noise a requirement

Küba DE *professional*

Application benefits for contractors and operators

For even the most demanding applications the Küba DE *professional* is up to the job. Whether aggressive ambient air, critical storage conditions or constant exchange of air: For fine-tuned cooling reliability, the high-performance evaporator offers variable corrosion protection, options for defrosting solutions and fan types to suit the requirements.

The Küba DE *professional* is optimal for:

- Cold rooms which are accessed frequently and therefore regularly exchange air with the outside
- Air containing aggressive particles which may be a by-product of industrial cooling processes (salts, organic acids in pickling rooms, organic acids or amines in meat and sausages)

The Küba DE *professional* offers obvious space saving as well as the powerful ceiling mounted evaporator with draught-free air flow.

Küba DE *professional*

from the GEA Küba Blue Line production range

The size of the store and type of stored goods are decisive in the selection of air coolers.

For high turnover of goods and long storage times, the Küba DE *professional* is the benchmark in terms of efficiency and reliability. If the storage rooms are frequently accessed to remove or store goods, the cooling power of the evaporator must be dimensioned to ensure that the indoor temperature distribution remains constant.

Conditions changing frequently from dry, to moist, to cold and to warm will create high corrosive stress. The lower temperature on the air cooler surfaces will result in condensate formation on these surfaces which will in turn attract aggressive salts or cleaning agent particles in the cold room air.


The Küba DE *professional* is the ideal air cooler for this application. The decisive factor is the aligned tubing which will produce more cooling power per surface area than standard air coolers.

The compact high-performance ceiling mounted evaporator ensures that the air is uniformly distributed, thereby ensuring that the room temperature is maintained throughout the cold room, even in the corners.

Depending on configuration, applications may range from normal cooling to deep freezing down to -30°C .

It is important that regulatory hygiene guidelines are complied with. The Küba DE *professional* has a hinged drip tray and removable side panels for simple, fast and cost-effective cleaning.

We can of course also offer the Küba DE *professional* with EC and AC fans. Please contact your GEA Küba sales consultant for an optimised design and savings through improved energy efficiency.

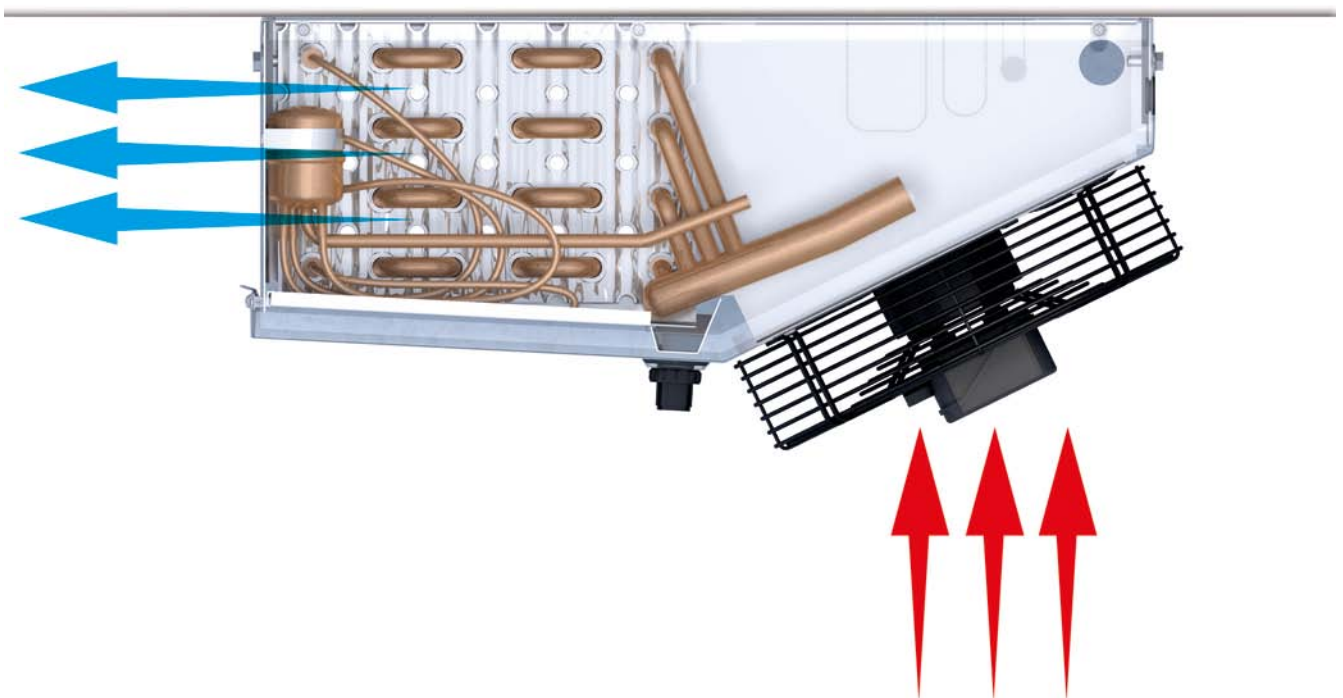


Küba DE *professional*

Basic version



Casing

- Smooth aluminum; zinc coated steel
- High grade powder-coating, food-safe, papyrus white, RAL 9018
- End plates, stucco aluminium, not coated
- Food-safe
- Easy to clean
- Best quality powder coated edges
- Compact design
- Hinged drip tray and removable side panels
- Double drip tray
- Stainless steel mounting material
- Plastic drain

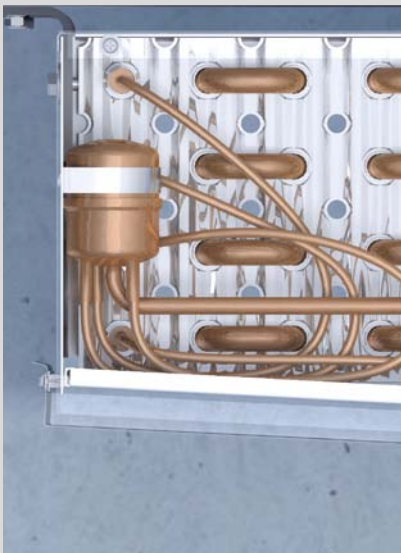

Heat exchanger for direct expansion

- Heat exchanger with aligned tube pattern; internally grooved special copper tubes (drawn oxygen-free), according to DIN EN 12735-1,2; diameter: 15 mm; with closed pure-aluminum HFE® fins
- Fin spacing:
A = 4.5 mm | B = 7 mm
- Fins flared to form-fit the core tube
- Highly effective heat transfer and compact design
- Series DE-F: HFC/CO₂
Küba-CAL® refrigerant distributors for multiple injections
Tubing: special copper piping with inner fins; *Fins*: Al; *End plates*: Al
- Series DE-G: Glycol
Tubing: Cu smooth; *Fins*: Al; *End plates*: Al
- Series DE-N: with pump /NH₃
Distribution tubes for multi injections
Tubing: VA; *Fins*: Al; *End plates*: Al



Electric defrost


- Heaters with CrNi steel sleeve
- Vapour-tight connections
- Mains voltage: 230 V-1/400V-3-Y
- Wired ready to connect in junction boxes
- Optimized tubular heater configurations ensure fast and even defrosting
- Fins flared to form-fit the core tube
- Aluminium heat pipes that ensure excellent heat transfer to the fins and thus effective defrosting cycles with optimized service life.
- Integrated tube bushings allow a subsequent modification to an electric defrost system.



Fans

- Available fan diameter: 300 mm
 - Permissible motor ambient temperatures: -30°C bis $+60^{\circ}\text{C}$
 - $230 \pm 10\%$ V-1~, 50 Hz/60 Hz
 - With built-in protector, according to VDE provisions
 - Fans are wired to an internal distribution box
 - Protection class: IP44
 - Insulation class: B
- Operating data can be found with Küba Select or in the technical data
 - Controller:
 - Phase control
 - Transformer
 - Delta/star
 - Frequency converter

Please observe the manufacturer's information!

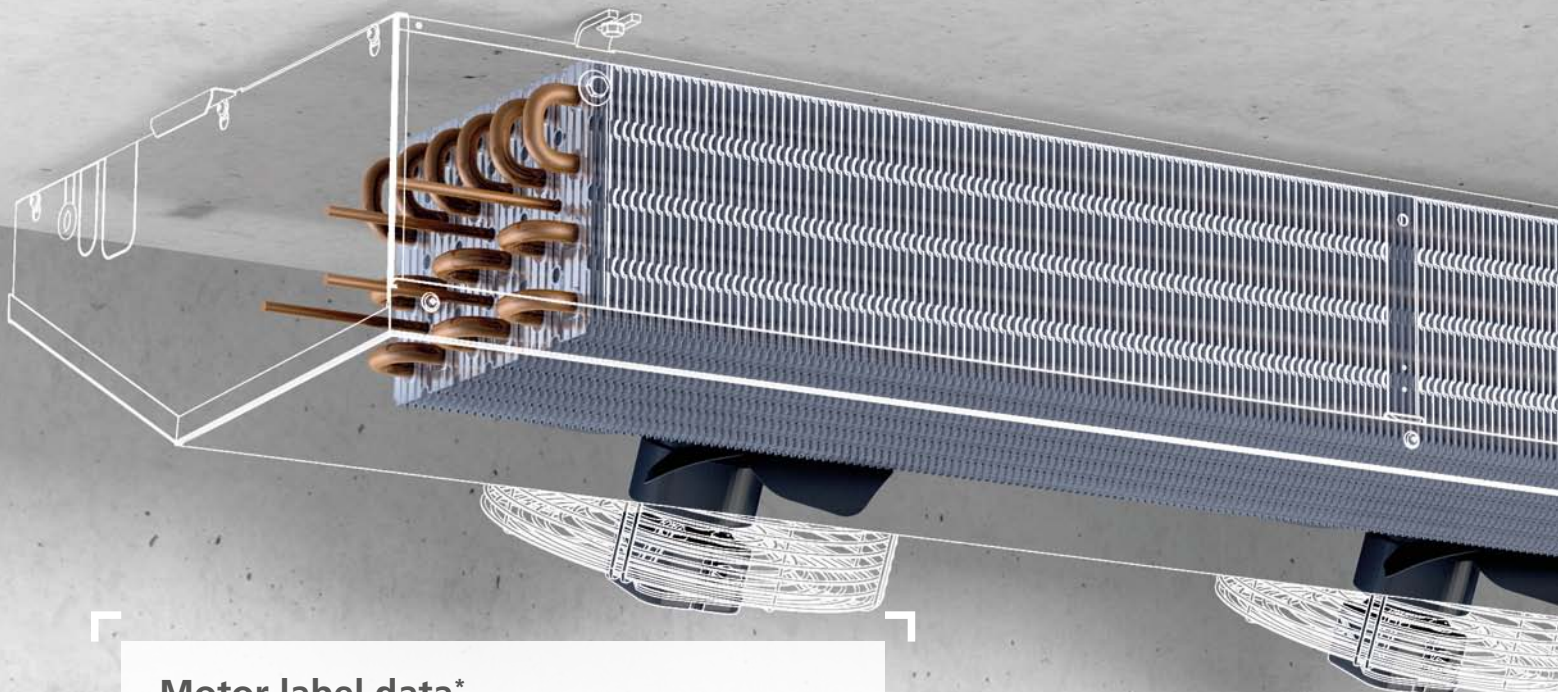

Motor label data*

Type	Ø mm	50 Hz			60 Hz		
		rpm	W	A	rpm	W	A
DE 071-094 D	300	1,350	70	0.32	1,500	90	0.40

Motor data per fan

*Data provided by the manufacturer

Küba DE professional

Technical data – DEA(E)



Type	Rating Q ₀ at 50 Hz, DT1, R404A		Cooling surface m ²	Air flow m ³ /h	Air throw *** m	Tube volume dm ³	Connections		Sound L _{WA} db (A)	Fans (Operational values at 50 Hz)				
	SC2	SC3					Inlet Ø mm	Outlet Ø mm		Blade Ø mm	Current 230 ± 10% V-1 50 Hz	Per Fan		
	kW	kW										rpm	W	A
① DEA 071 D DEA 081 D DEA 091 D	1.9	1.5	12.9	1,100	9	2.8	12x1.0*	15x1.0	68	300	230 V-1	1,350	72	0.3
	2.1	1.7	16.1	1,070	9	3.5	12x1.0*	15x1.0	68	300	230 V-1	1,350	72	0.3
	2.3	1.9	19.3	1,035	9	4.2	12x1.0*	15x1.0	68	300	230 V-1	1,350	72	0.3
② DEA 072 D DEA 082 D DEA 092 D	3.8	3.0	25.8	2,200	11	5.6	12x1.0*	15x1.0	71	300	230 V-1	1,350	72	0.3
	4.2	3.3	32.2	2,140	11	7.0	12x1.0*	22x1.0	71	300	230 V-1	1,350	72	0.3
	4.7	3.7	38.6	2,070	11	8.4	10x1.0*	22x1.0	71	300	230 V-1	1,350	72	0.3
③ DEA 083 D DEA 093 D	6.3	5.0	48.3	3,210	12	10.5	10x1.0**	22x1.0	73	300	230 V-1	1,350	72	0.3
	7.0	5.6	57.9	3,105	12	12.6	10x1.0**	22x1.0	73	300	230 V-1	1,350	72	0.3
④ DEA 084 D DEA 094 D	8.4	6.7	64.4	4,280	16	14.0	10x1.0**	22x1.0	74	300	230 V-1	1,350	72	0.3
	9.4	7.5	77.2	4,140	16	16.8	10x1.0**	28x1.5	74	300	230 V-1	1,350	72	0.3

Subject to modification.

Standard condition	t _{L1}	t ₀	DT1
NB2/SC2	0	-8	8
NB3/SC3	-18	-25	7

Correction factors
for other refrigerants

Refrigerant	NB2/SC2	NB3/SC3
R134a	1.00	0.91
R507	0.97	0.97
R22	0.95	0.95

* Single injection

** Multiple injection through Küba CAL® distributor

*** Throw limit at 0.5 m/s

Küba DE professional

Technical data – DEB(E)



Type	Rating Q ₀ at 50 Hz, DT1, R404A		Cooling surface m ²	Air flow m ³ /h	Air throw *** m	Tube volume dm ³	Connections		Sound L _{WA} db (A)	Fans (Operational values at 50 Hz)				
	SC2	SC3					Inlet Ø mm	Outlet Ø mm		Blade Ø mm	Current 230 ± 10% V-1 50 Hz	Per Fan		
	kW	kW										rpm	W	A
① DEB 071 D DEB 081 D DEB 091 D	1.5	1.2	5.4	1,280	10	2.8	12x1.0*	15x1.0	68	300	230 V-1	1,350	72	0.3
	1.8	1.4	10.6	1,220	10	3.5	12x1.0*	15x1.0	68	300	230 V-1	1,350	72	0.3
	2.0	1.6	12.7	1,120	10	4.2	12x1.0*	15x1.0	68	300	230 V-1	1,350	72	0.3
② DEB 072 D DEB 082 D DEB 092 D	3.1	2.4	16.8	2,560	12	5.6	12x1.0*	15x1.0	71	300	230 V-1	1,350	72	0.3
	3.6	2.9	21.2	2,440	12	7.0	12x1.0*	22x1.0	71	300	230 V-1	1,350	72	0.3
	4.0	3.2	25.4	2,240	12	8.4	10x1.0*	22x1.0	71	300	230 V-1	1,350	72	0.3
③ DEB 083 D DEB 093 D	5.4	4.3	31.8	3,660	14	10.5	10x1.0**	22x1.0	73	300	230 V-1	1,350	72	0.3
	6.0	4.8	38.1	3,360	14	12.6	10x1.0**	22x1.0	73	300	230 V-1	1,350	72	0.3
④ DEB 084 D DEB 094 D	7.2	5.7	42.4	4,880	17	14.0	10x1.0**	22x1.0	74	300	230 V-1	1,350	72	0.3
	8.0	6.4	50.8	4,480	17	16.8	10x1.0**	28x1.5	74	300	230 V-1	1,350	72	0.3

Subject to modification.

Standard condition	t _{L1}	t ₀	DT1
NB2/SC2	0	-8	8
NB3/SC3	-18	-25	7

Correction factors
for other refrigerants

Refrigerant	NB2/SC2	NB3/SC3
R134a	1.00	0.91
R507	0.97	0.97
R22	0.95	0.95

* Single injection

** Multiple injection through Küba CAL® distributor

*** Throw limit at 0.5 m/s

Küba DE professional


Dimensions, weights, electric defrost, drain

Type	Dimensions							Electrical defrost 230 V-1 / 400 V-3-Y			Weights (net)				Weights (gross)				Drain
	H	B	T	L	E ₁	E ₂	F	Coil	Tray	Total	DEA	DEA E	DEB	DEB E	DEA	DEA E	DEB	DEB E	D
	mm	mm	mm	mm	mm	mm	mm	kW	kW	kW	kg	kg	kg	kg	kg	kg	kg	kg	inch
DE 071 D	260	1,080	669	672	730	-	175	0.7	0.8	1.5	26	28	24	26	29	32	27	30	G ¾
DE 081 D	260	1,080	669	672	730	-	175	1.4	0.8	2.1	27	30	28	27	30	33	28	31	G ¾
DE 091 D	260	1,080	669	672	730	-	175	1.4	0.8	2.1	31	34	26	31	34	37	31	34	G ¾
DE 072 D	260	1,780	669	672	1,430	-	175	1.2	1.3	2.5	45	48	41	44	50	53	46	49	G ¾
DE 082 D	260	1,780	669	672	1,430	-	175	2.4	1.3	3.7	47	51	42	46	52	56	47	51	G ¾
DE 092 D	260	1,780	669	672	1,430	-	175	2.4	1.3	3.7	54	58	54	58	59	63	58	62	G ¾
DE 083 D	260	2,480	669	672	2,130	1,400	175	3.4	1.8	5.2	67	72	62	66	75	80	68	73	G ¾
DE 093 D	260	2,480	669	672	2,130	1,400	175	3.4	1.8	5.2	73	78	70	76	80	85	77	82	G ¾
DE 084 D	260	3,180	669	672	2,830	1,400	175	4.6	0.6	5.2	79	87	72	82	102	118	106	114	G ¾
DE 094 D	260	3,180	669	672	2,830	1,400	175	4.6	0.6	5.2	87	93	77	82	114	126	110	122	G ¾

Subject to modification.

The dimensions are only valid for the standard model design! Note the differences in dimension among versions and accessories.

Dimensional drawings Küba DE professional (1-4 motors)

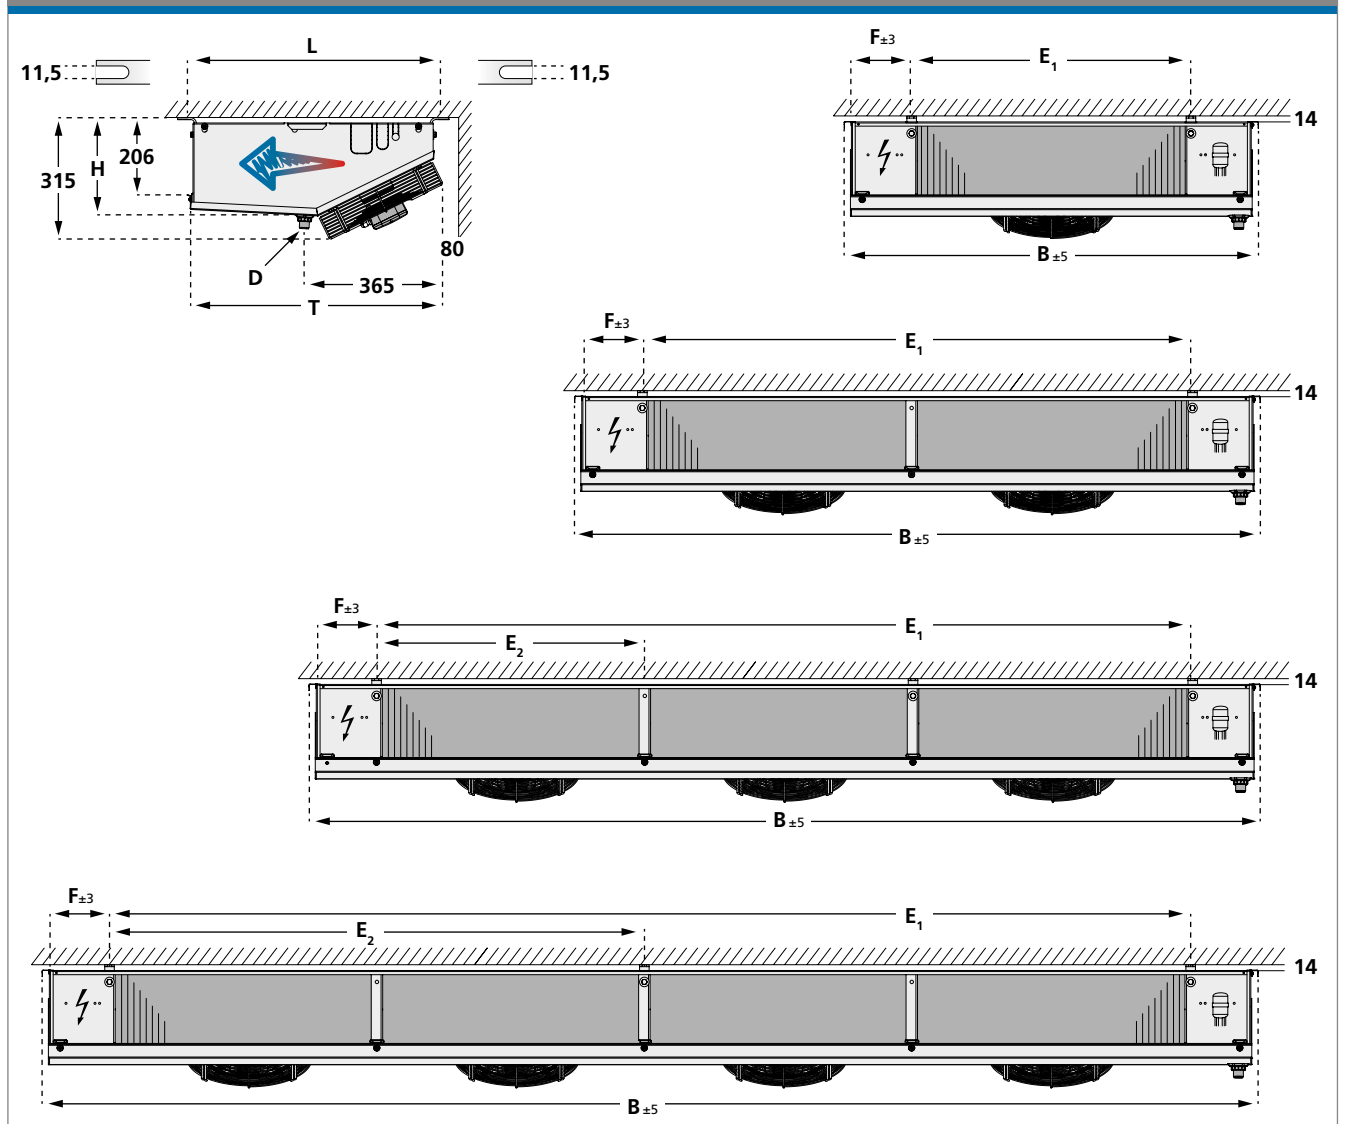

Küba DE *professional*

Variants

Motor-Variants

V1.33 Fans, silent version

Fans 230V±10% V-1-
50/60 Hz; 1,100 rpm
Reduced air volume flow
Lower sound power level

V1.50 EC fans with fixed speeds

Fixed fan speed at optimal operating point

V1.52 EC fan with controllable speed

Fans adjustable

Protection against corrosion

V3.12 Stainless steel casing

Special protection from salts (no chlorine) and organic acids in the cold room air

V6.01 Corrosion protection 1

Tubing: Copper (NH₃ units = stainless steel)
Fins: Aluminum, epoxy-resin-coated
End plates: Aluminum protective coating
Casing: Aluminum/zinc coated steel,
protective coating on both sides

V6.02 Corrosion protection 2

Tubing: Stainless steel (V2A)
Fins: Aluminum, epoxy-resin-coated
End plates: Stainless steel
Casing: Aluminum/zinc coated steel,
protective coating on both sides

V6.03 Corrosion protection 3

Tubing: Stainless steel (V2A)
Fins: Aluminum
End plates: Aluminum
Casing: Aluminum/zinc coated steel,
protective coating on on one side

V6.04 Corrosion protection 4

Tubing: Copper (NH₃ units = stainless steel)
Fins: Aluminum, epoxy-resin-coated
End plates: Aluminum
Casing: Aluminum/zinc coated steel,
protective coating on on one side

Construction-Variants

V3.09 Double-walled, insulated drip tray

Prevents condensed water from forming on the bottom side of the pan, and it reduces the transfer of defrost heat into the cold rooms.

V2.05 Water / brine circulation

With a large number of distributors
(small pressure drop)

V2.06 Water / brine circulation

With a small number of distributors
(large pressure drop)

CO₂-Variants

V7.45 CO₂-Direct expansion


up to 45 bar operating pressure

V7.60 CO₂-Direct expansion

up to 60 bar operating pressure

Electric heater DEHR


For air coolers with forced-draft fans, for assembly on site.
 Suitable for air conditioning, or heating, in the winter.
 For optimal heat transfer, the heater rods are fitted in
 Cu tube sleeves.

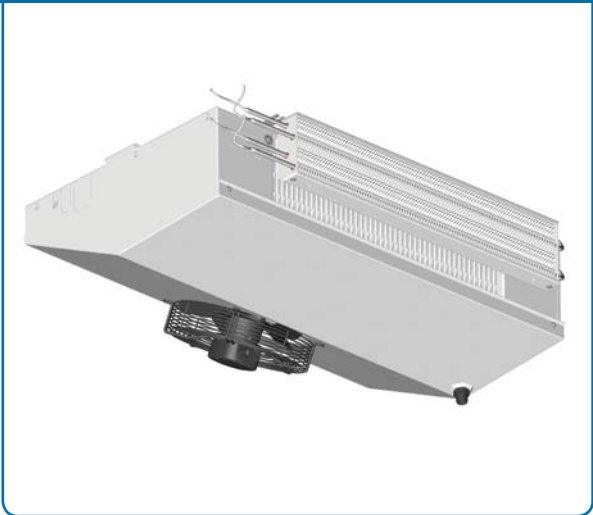

- Fully powder-coated (RAL 9018)
- $230 \pm 10\%$ V-1~ or $400 \pm 10\%$ V-3~ -Y
- Heater rods with CrNi steel sleeve
- Vapour-tight connections
- Connecting cable 1.0 mm² x 1000 mm
- Casing: steel, continuous hot-dip zinc coated
- Fins: aluminium
- Tube sleeves: Cu

Selection table & dimensions:

For type	Description	230±10%V-1~		Dimensions					Weight
		Current A	Capacity kW	H mm	L mm	L ₁ mm	E mm	F mm	net kg
071D	HR4-70	4.7	1.1	145	755	700	733	76	1.7
081D	HR4-70	4.7	1.1	145	755	700	733	76	1.7
091D	HR4-70	4.7	1.1	145	755	700	733	76	1.7
072D	HR4-140	9.3	2.1	145	1,433	1,400	1,433	76	3.0
082D	HR4-140	9.3	2.1	145	1,433	1,400	1,433	76	3.0
092D	HR4-140	9.3	2.1	145	1,433	1,400	1,433	76	3.0
083D	HR4-210	14.7	3.4	145	2,133	2,100	2,133	76	4.3
093D	HR4-210	14.7	3.4	145	2,133	2,100	2,133	76	4.3
084D	HR4-280	18.8	4.3	145	2,855	2,800	2,833	76	5.8
094D	HR4-280	18.8	4.3	145	2,855	2,800	2,833	76	5.8

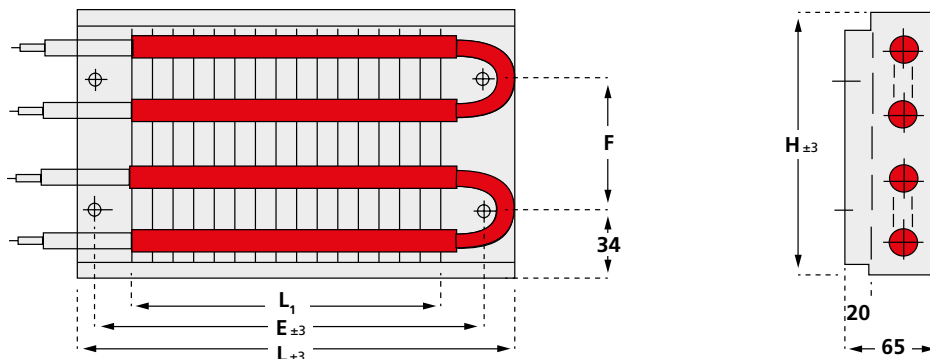

NOTE:

Operate only when the air cooler fans are running, to prevent the cold storage ceiling from overheating.
 Please observe the corresponding safety guidelines.



We live our values.

Excellence • Passion • Integrity • Responsibility • GEA-versity

GEA Group is a global engineering company with multi-billion euro sales and operations in more than 50 countries. Founded in 1881, the company is one of the largest providers of innovative equipment and process technology. GEA Group is listed in the STOXX® Europe 600 index.

GEA Heat Exchangers

GEA Küba GmbH

Kühler Weg 1 · 82065 Baierbrunn · Germany

Tel.: ++49(0)89/744 73-0 · Fax: ++49(0)89/744 73-107

kueba@gea.com · www.kueba.com