


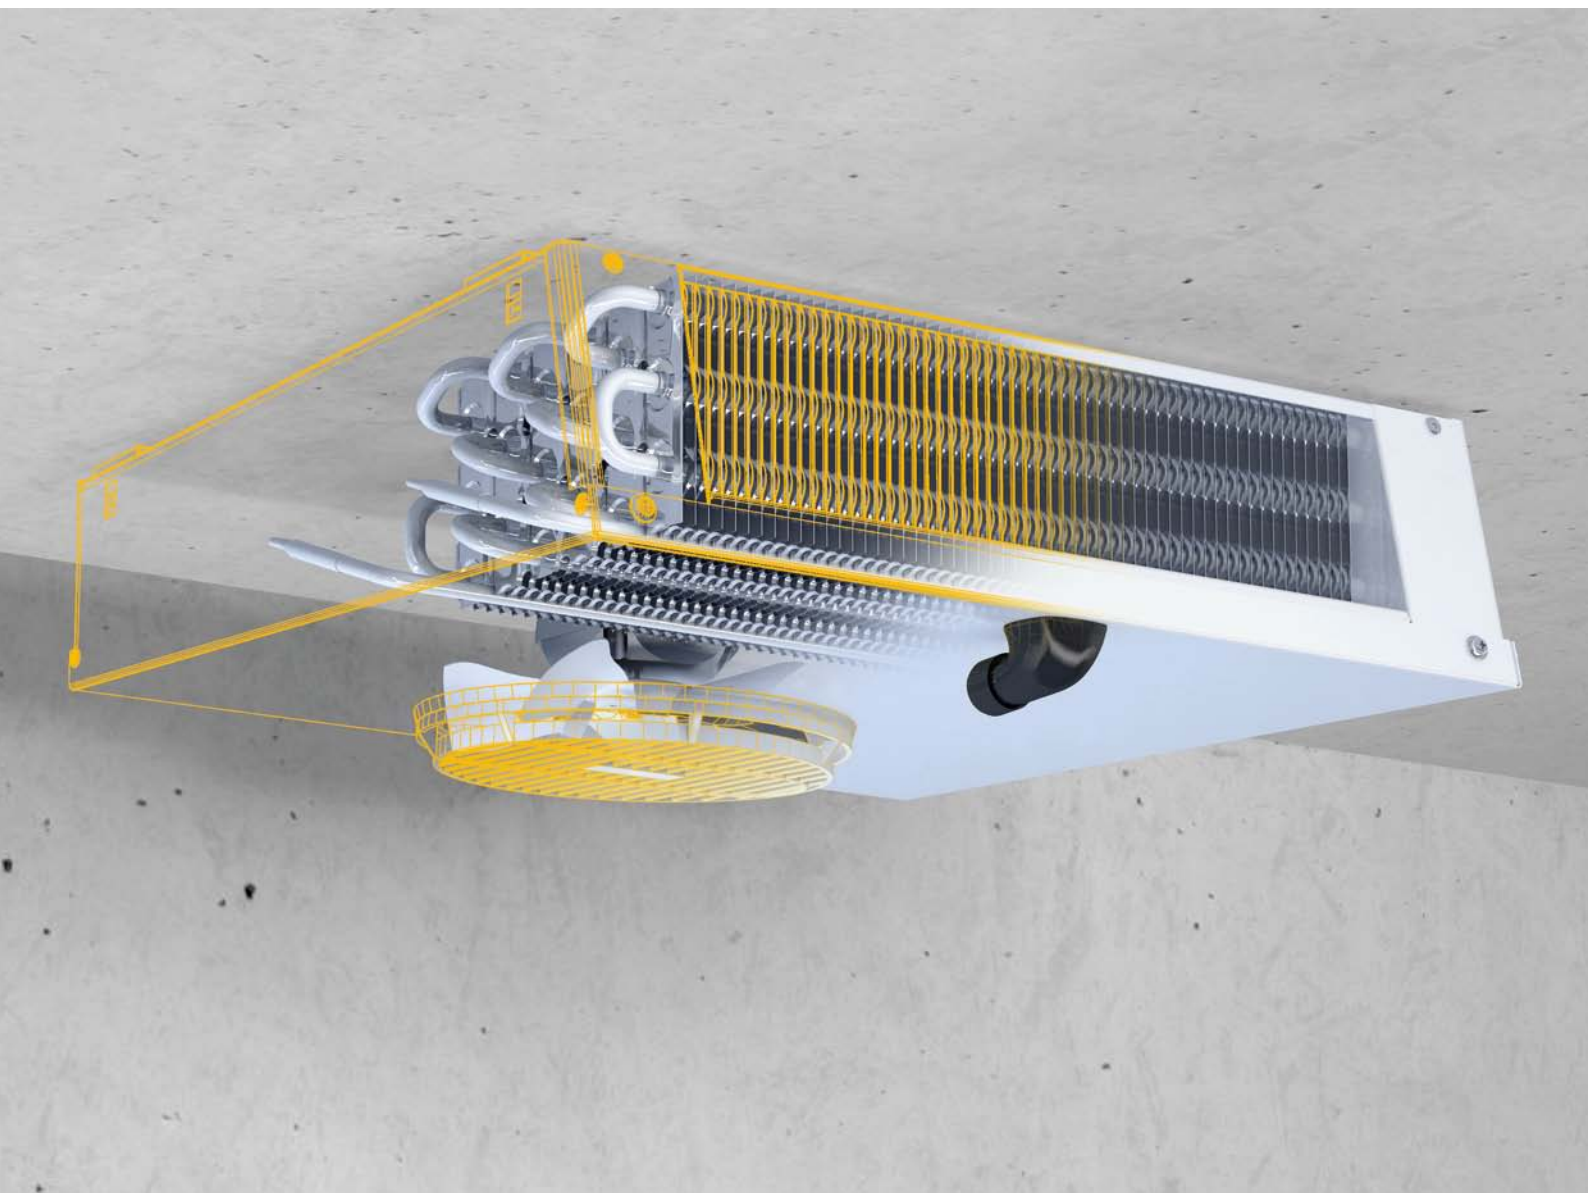

Küba *junior* DF


Compact ceiling mounted air cooler, fully coated for hygiene

Küba *junior* DF

Compact ceiling mounted air cooler, fully coated for hygiene



For extreme applications as well

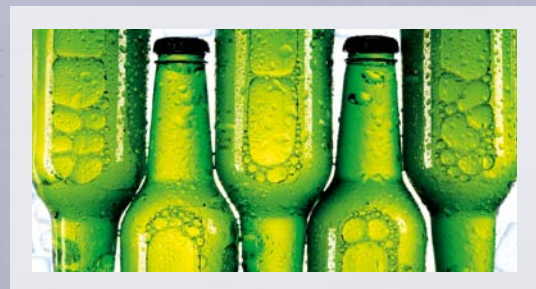

Best air guidance



Completely powder-coated

Extremely space-saving

Type designation code

1

2

3

4

5

6

DF

B

E

02

3

E

1 Model range designation

2 Fin spacing

3 Electric defrost

4 Size

5 Number of fans


6 Generation Code



Capacity range (for SC2)

0.4 kW  2.0 kW

Temperature range (t_{L1})



Number of fans



Content

Application benefits for contractors and operators	4
Basic version	6
Technical data – DFA(E)	8
Technical data – DFB(E)	8
Dimensions, weights, electric defrost, drain	9
Variants	10



Applications

- ➔ Cooling of bottles
- ➔ Storage for instant and deep frozen meals
- ➔ Storage of ice cream
- ➔ Cooling of packaged and open products

Küba *junior* DF

Application benefits for contractors and operators

Just filling up belongs to yesterday. Filling stations have long since turned into neatly sorted fresh food shops, open 24/7.

Even snack bars and kiosks are reporting a rising demand for beverages and food. This is why they are constantly increasing their range of stored foodstuffs. This demands competent short-time storage of ready and pre-packaged food – a requirement which conventional refrigerators and chest freezers cannot meet, neither in terms of energy nor cooling technology.

Beverages, dairy products and packaged foodstuffs have different requirements – in terms of storage temperature, for instance.

Under these conditions, economical and hygienic storage of fresh products is feasible only in small cold stores.

The *junior* DF is the perfect solution for keeping salads, fruit, vegetables, meat and sausages fresh in kitchens, canteens and the retail trade. Its full hygiene coating renders the unit particularly suitable for areas where the demands for hygiene are strict.



The Küba *junior* DF is a star in small cold stores – for cooling packaged as well open goods.

Küba *junior* DF

from the GEA Küba Green Line production range


The compact Küba *junior* DF is designed especially for cooling foodstuffs with due regard for the requisite safety:

- The condensate tray has an optional horizontal or vertical drain.
- The high-grade powder coated aluminium housing offers ideal corrosion protection. An integrated air baffle ensures optimal airflow.
- The drip tray can be folded down for easier cleaning and maintenance.
- Its low construction height and the condensate drain sloping towards the back allow maximum utilisation of the cold store.

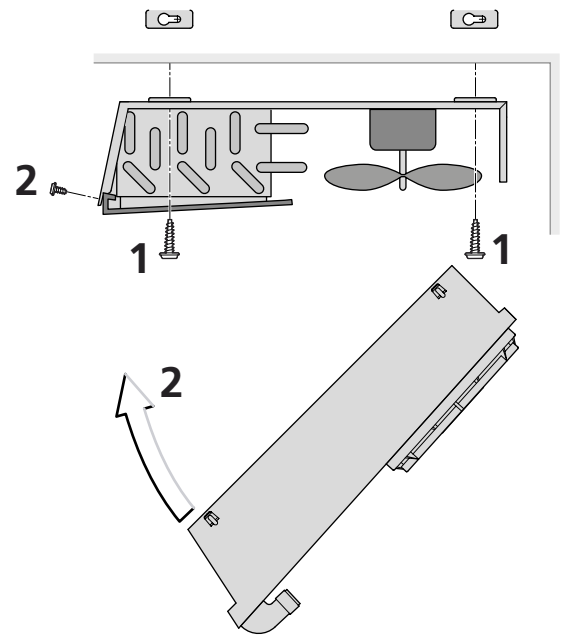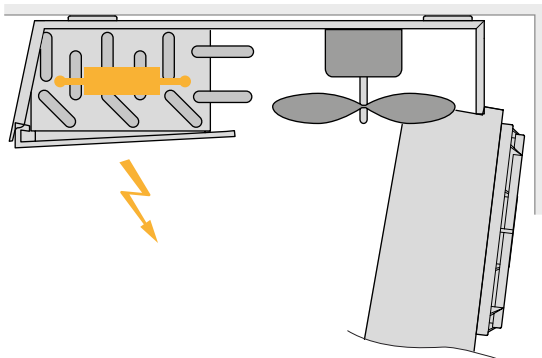

The Küba *junior* DF, despite its compact dimensions, is not to be trifled with. It ensures that the necessary storage temperature is maintained throughout by its excellent distribution of air – no warm puddles anywhere to spoil the foodstuffs.

Its large cooling area ensures long cooling periods and infrequent defrosting. Under extreme conditions such as in deep freeze compartments and when goods are removed frequently, a supplementary electrical heater may be retro-fitted to ensure smooth operation.

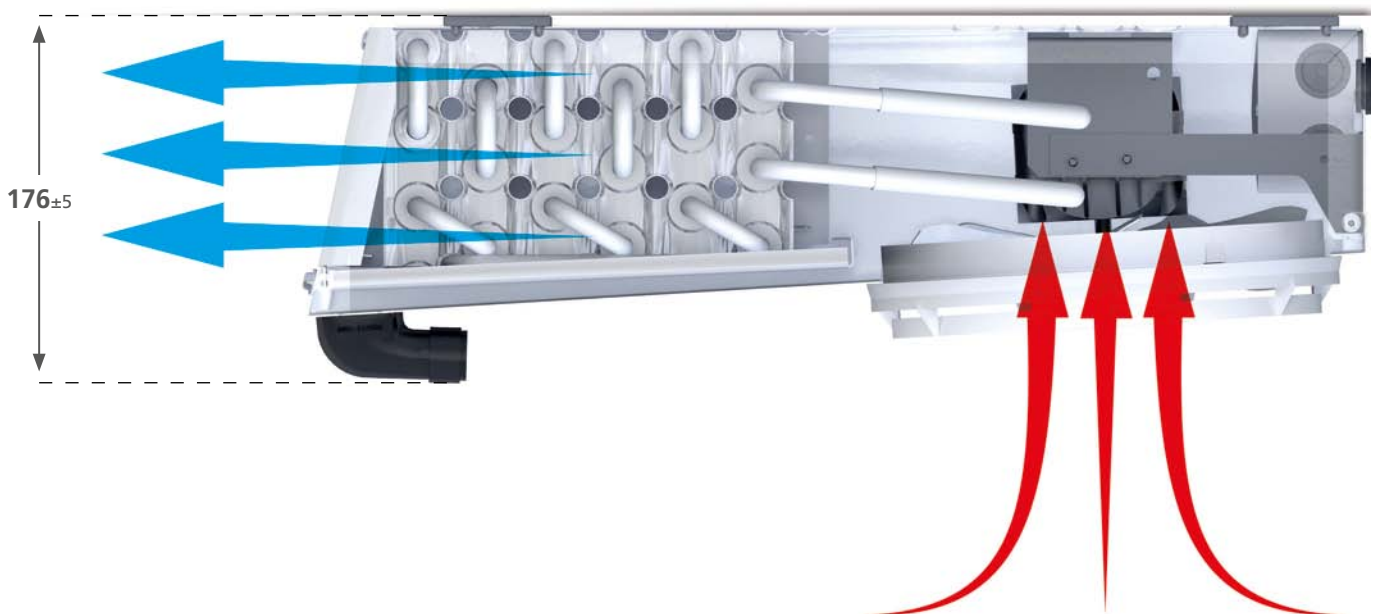


Küba *junior* DF

Basic version



Casing

- Aluminium, Sendzimir zinc-plated steel, smooth
- High-grade powder coating RAL 9018 papyrus white
- Food-safe
- Easy to clean
- Best quality powder coated edges
- Drip tray can be folded down and unclipped
- Double drip tray
- Height only 180 mm (incl. drain)

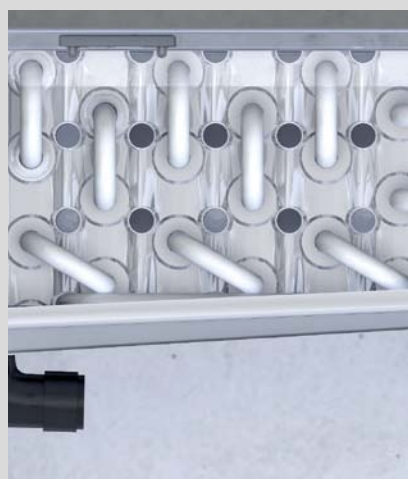

Heat exchanger for direct expansion

- Heat exchanger with staggered tube system consisting of special copper tubes, drawn oxygen-free and inner finned according to DIN EN 12735-1,2 with 10 mm (1-2 mot.) and with 12 mm (3 mot.) diameter and closed, pure-aluminum HFE fins
- Internal cleanliness according to DIN 8964
- Fin spacing:
A = 4.5 mm | B = 7 mm
- Fins flared to form-fit the core tube
- Highly effective heat transfer and compact design
- Tubing: Cu-Special
Fins: Aluminium
End plates: Aluminium
- Completely powder-coated (hygienic paint)




Electric defrost

- Heaters with CrNi steel sleeve
- Vapour-tight connections
- Mains voltage: 230 V-1/400V-3-Y
- Wired ready to connect in junction boxes
- Optimized tubular heater configurations ensure fast and even defrosting
- Fins flared to form-fit the core tube
- Aluminium heat pipes that ensure excellent heat transfer to the fins and thus effective defrosting cycles with optimized service life.



Fans (EC)

- Fans are wired to an internal distribution box
 - Electronic motor protection
 - Permissible motor ambient temperatures: -40°C bis +50°C
 - Available fan diameter: 200 mm
 - Protection class: IP54;
 - Insulation class: H
 - 230 V 50/60 Hz
- Operating values are the values of the built-in motor at +20 °C, with an unobstructed air flow and a dry surface
 - Controller:
 - Phase control ☐
 - Transformer ☐
 - Delta/star ☐
 - Frequency converter ☐
- Please observe the manufacturer's information!

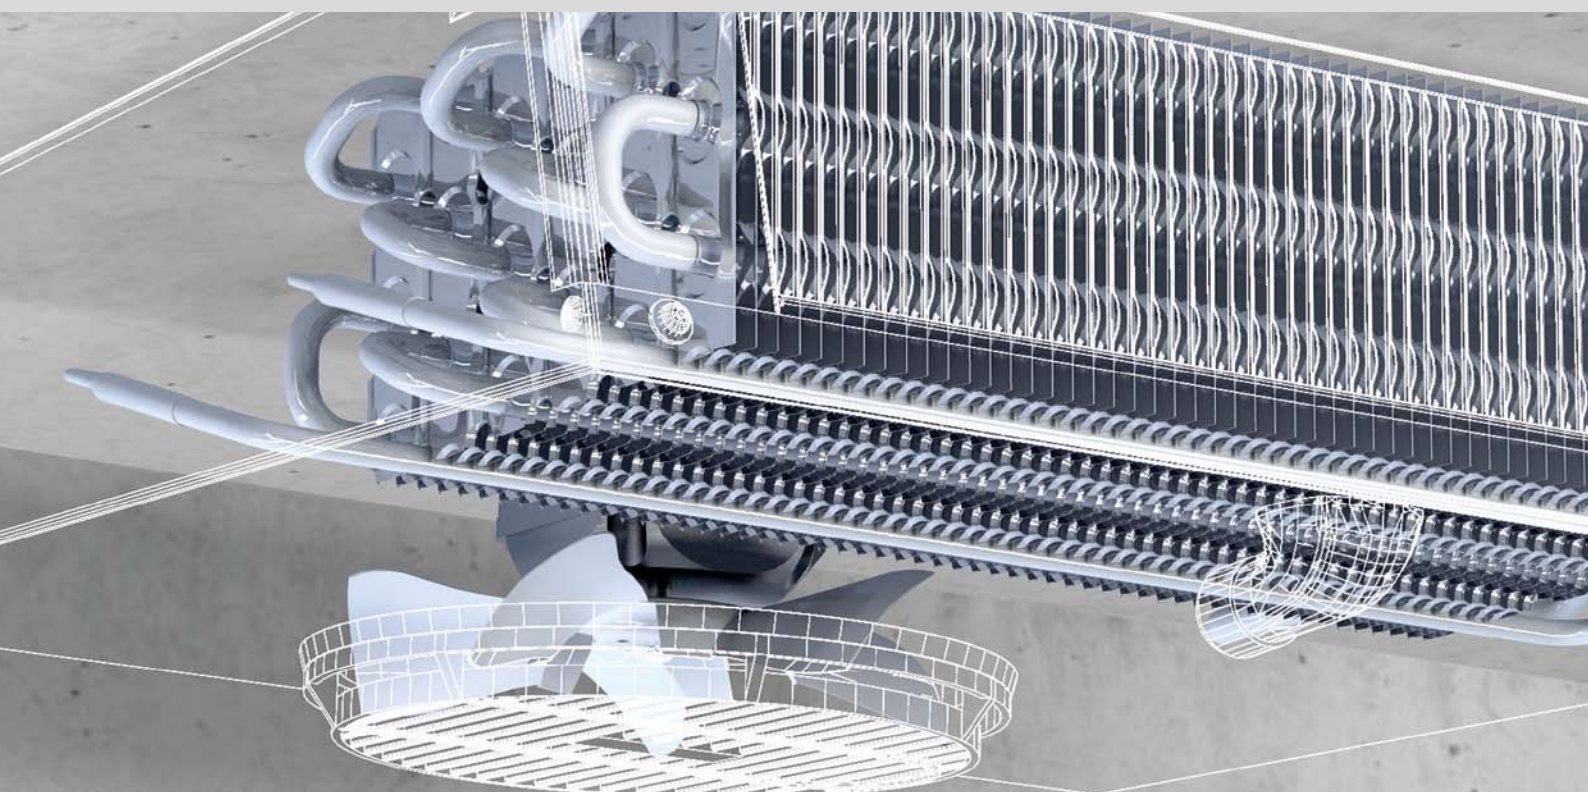

Motor label data*

Type	Ø mm	50 Hz			60 Hz		
		rpm	W	A	rpm	W	A
DF 011-033 E	200	1,300	24	0.20	1,300	24	0.20

Motor data per fan

* Data provided by the manufacturer

Küba junior DF

Technical data – DFA(E)



4,5 mm

Type	Rating Q ₀ at 50 Hz, DT1, R404A		Cooling surface m ²	Air flow m ³ /h	Air throw *** m	Tube volume dm ³	Connections		Sound L _{WA} db (A)	Fans (Operational values at 50 Hz)				
	SC2	SC3					Inlet	Outlet		Blade	Current	Per Fan		
	kW	kW					Ø mm	Ø mm		Ø mm	230 ± 10% V-1 50 Hz	rpm	W	A
DFA 011 E	0.46	0.37	2.1	250	5	0.3	10 x1.0*	10 x1.0*	62	200	230 V -1	1,310	9	0.07
DFA 021 E	0.56	0.45	2.8	290	5	0.4	10 x1.0*	10 x1.0*	62	200	230 V -1	1,310	9	0.07
DFA 031 E	0.67	0.54	4.1	260	5	0.6	10 x1.0*	10 x1.0*	62	200	230 V -1	1,310	9	0.07
DFA 022 E	1.12	0.89	5.6	580	6	0.8	10 x1.0*	10 x1.0*	65	200	230 V -1	1,310	9	0.07
DFA 032 E	1.34	1.07	8.2	520	6	1.2	10 x1.0*	10 x1.0*	65	200	230 V -1	1,310	9	0.07
DFA 023 E	1.68	1.34	8.4	870	9	1.2	10 x1.0*	10 x1.0*	67	200	230 V -1	1,310	9	0.07
DFA 033 E	2.01	1.61	12.3	780	9	1.8	10 x1.0*	10 x1.0*	67	200	230 V -1	1,310	9	0.07

Standard condition t₁ t₀ DT1
NB 2/SC2 0 -8 8
NB 3/SC3 -18 -25 7

* Single injection
** Multiple injection
*** Throw limit at 0.5 m/s

Operating values are the values of the built-in motor at +20 °C, with an unobstructed air flow and a dry surface

Subject to modification.

Küba junior DF

Technical data – DFB(E)



7 mm

Type	Rating Q ₀ at 50 Hz, DT1, R404A		Cooling surface m ²	Air flow m ³ /h	Air throw *** m	Tube volume dm ³	Connections		Sound L _{WA} db (A)	Fans (Operational values at 50 Hz)				
	SC2	SC3					Inlet	Outlet		Blade	Current	Per Fan		
	kW	kW					Ø mm	Ø mm		Ø mm	230 ± 10% V-1 50 Hz	rpm	W	A
DFB 011 E	0.40	0.32	1.4	280	5	0.3	10 x1.0*	10 x1.0*	62	200	230 V -1	1,310	9	0.07
DFB 021 E	0.48	0.38	1.8	320	5	0.4	10 x1.0*	10 x1.0*	62	200	230 V -1	1,310	9	0.07
DFB 031 E	0.61	0.49	2.7	290	5	0.6	10 x1.0*	10 x1.0*	62	200	230 V -1	1,310	9	0.07
DFB 022 E	0.96	0.77	3.6	640	6	0.8	10 x1.0*	10 x1.0*	65	200	230 V -1	1,310	9	0.07
DFB 032 E	1.22	0.97	5.4	580	6	1.2	10 x1.0*	10 x1.0*	65	200	230 V -1	1,310	9	0.07
DFB 023 E	1.44	1.15	5.4	960	9	1.2	10 x1.0*	10 x1.0*	67	200	230 V -1	1,310	9	0.07
DFB 033 E	1.83	1.46	8.1	870	9	1.8	10 x1.0*	10 x1.0*	67	200	230 V -1	1,310	9	0.07

Standard condition t₁ t₀ DT1
NB 2/SC2 0 -8 8
NB 3/SC3 -18 -25 7

* Single injection
** Multiple injection
*** Throw limit at 0.5 m/s

Operating values are the values of the built-in motor at +20 °C, with an unobstructed air flow and a dry surface


Subject to modification.

Küba junior DF

Dimensions, weights, electric defrost, drain

Type	Dimensions							Electrical defrost 230 V-1 / 400 V-3-Y	Weights (net)		Weights (gross)		Drain
	H	B	T	L	E ₁	E ₂	F	Coil	DFA/B	DFA/B E	DFA/B	DFA/B E	D
	mm	mm	mm	mm	mm	mm	mm	kW	kg	kg	kg	kg	inch
1 DF 011 E	143	428	515	380	400	-	14	0.4	8	9	9	10	G ¾
DF 021 E	143	528	515	380	500	-	14	0.4	9	10	10	11	G ¾
DF 031 E	143	528	515	380	500	-	14	0.4	9	10	10	11	G ¾
2 DF 022 E	143	928	515	380	900	-	14	0.7	14	15	16	17	G ¾
DF 032 E	143	928	515	380	900	-	14	0.7	16	17	18	19	G ¾
3 DF 023 E	143	1,328	515	380	1,300	-	14	1.0	21	22	23	24	G ¾
DF 033 E	143	1,328	515	380	1,300	-	14	1.0	23	24	25	26	G ¾

The dimensions are only valid for the standard model design!
Note the differences in dimension among versions and accessories.

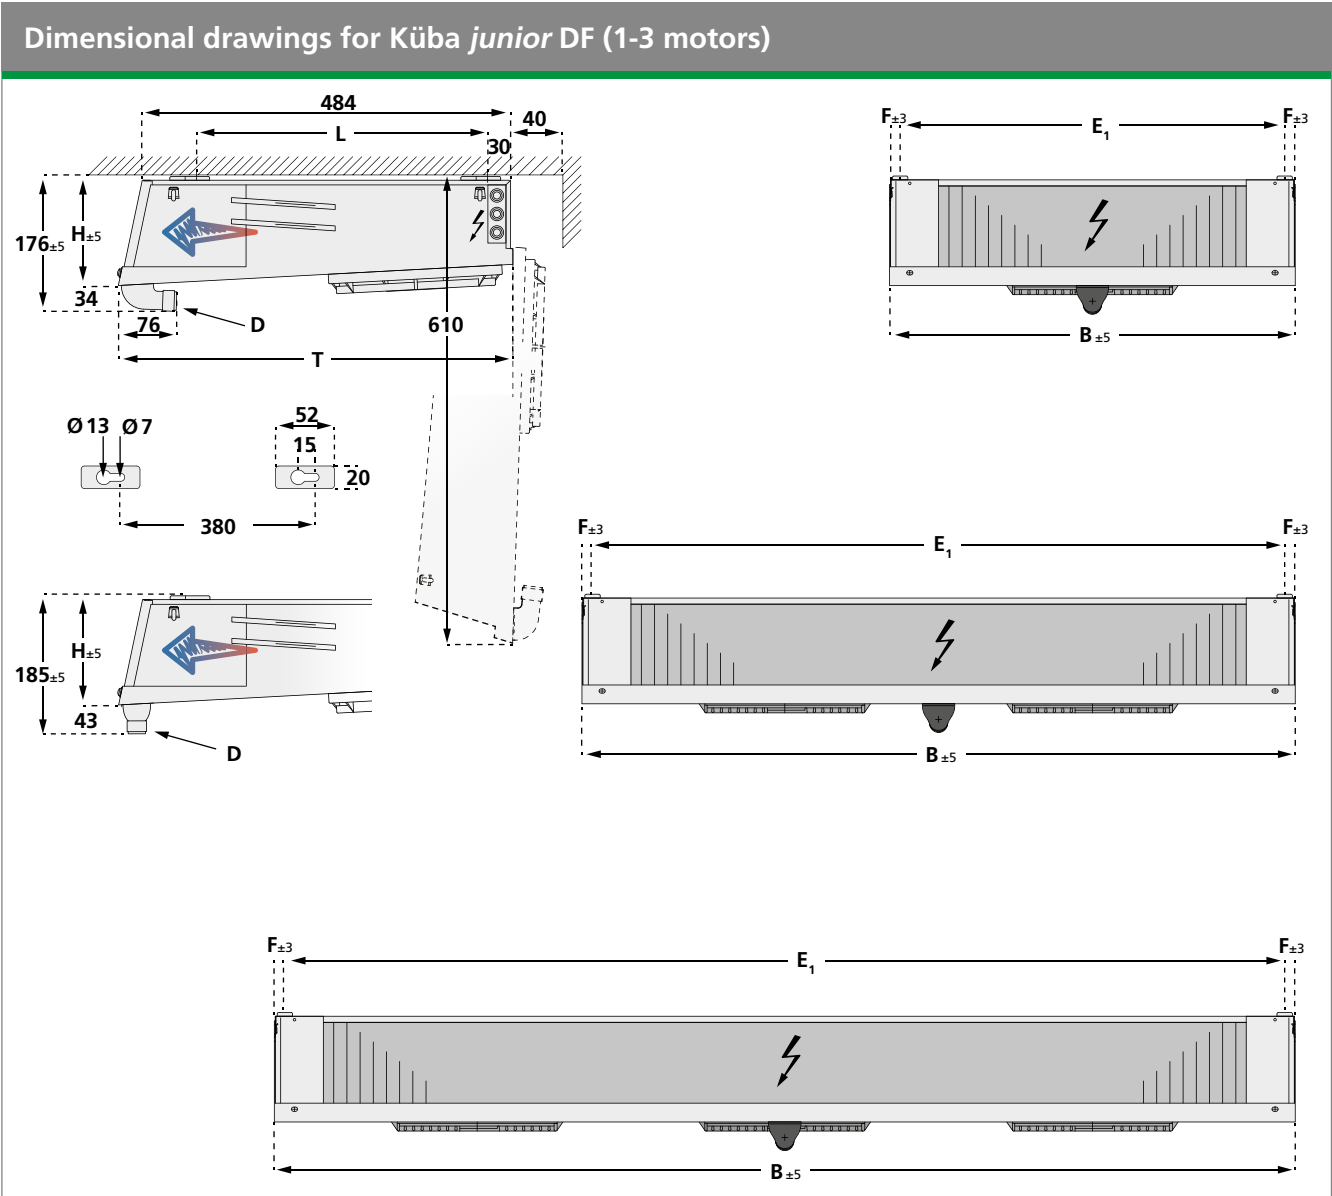

Küba junior DF

Variants

CO₂-Variants

V7.60 CO₂-Direct expansion
up to 60 bar operating pressure

Type	Rating Q ₀ at NB2, R 744 (CO ₂)	Cooling surface	Air flow	Air throw *	Tube volume	Connections (up to 60 bar)		Sound L _{WA}	Fans (Operational values at 50 Hz)		
	up to 60 bar					Inlet	Outlet		Per Fan		
	kW					m ²	m ³ /h	m	dm ³	Ø mm	Ø mm
DFBE 031 E	0.57	2.8	290	5	0.6	10x1.0	10x1.0	62	1,310	29	0.21
DFBE 032 E	1.14	5.6	580	6	1.1	10x1.0	10x1.0	65	1,310	29	0.21
DFBE 033 E	1.88	8.3	870	9	1.6	10x1.0	10x1.0	67	1,310	29	0.21

Standard condition t_{L1} t_o DT1 * Throw limit at 0.5 m/s
NB2/SC2 0 -8 8

Subject to modification.



We live our values.

Excellence • Passion • Integrity • Responsibility • GEA-versity

GEA Group is a global engineering company with multi-billion euro sales and operations in more than 50 countries. Founded in 1881, the company is one of the largest providers of innovative equipment and process technology. GEA Group is listed in the STOXX® Europe 600 index.

GEA Heat Exchangers

GEA Küba GmbH

Kühler Weg 1 · 82065 Baierbrunn · Germany

Tel.: ++49(0)89/744 73-0 · Fax: ++49(0)89/744 73-107

kueba@gea.com · www.kueba.com