



Küba SF *blastfreezer*

High-performance air cooler for blast chilling and shock freezing

Küba SF *blastfreezer*

High-performance air cooler for blast chilling and shock freezing



Large fin spacing to ensure long service life



Optimal air velocity



High air circulation rate and indirect air flow over

Height-adjustable floor brackets

Type designation code

1	2	3	4	5	6	7	8	
SF	L	E	56	-	F	6	6	C

- 1 Model range designation
- 2 Fin spacing
- 3 Electric defrost
- 4 Fan diameter
- 5 Refrigerant
- 6 Number of rows deep
- 7 Number of fans
- 8 Generation code




refrigerated goods

Abbildung zeigt GEA Küba SF blastfreezer mit Variante V1.60 & V3.10

Capacity range (for SC2)



Temperature range (t_{L1})



Number of fans



Content

Application benefits for contractors and operators.....	4
Basic version	6
Technical data (Standard) – SFB (E).....	8
Technical data (Standard) – SFK (E).....	8
Technical data (Standard) – SFL (E).....	8
Technical data (V1.60) – SFB (E).....	9
Technical data (V1.60) – SFK (E).....	9
Technical data (V1.60) – SFL (E).....	9
Dimensions, weights, electric defrost, drain.....	10
Variants	12
Accessories.....	13



Applications

- ➔ Blast chilling
- ➔ Shock freezing

Küba SF *blastfreezer*

Application benefits for contractors and operators

Shock freezing foodstuffs is technically extremely demanding on air coolers. The Küba SF *blastfreezer* meets these demands effortlessly.

The technical specifications covering the cooling surface, the air volume, the finned piping system and the distribution of the refrigerant have all created benchmarks and guarantee the reliability of the process.

They are accurately balanced in the SF *blastfreezer* to optimise shock freezing.

Height-adjustable floor brackets

- High-performance air cooler for shock cooling and freezing meat and sausage products, baked goods, pizza and frozen vegetables.
- Dimensions are designed to suit standard tray carts: perfect distribution of cold air directly onto the refrigerated goods.
- Height-adjustable floor brackets: for perfect adjustment to on-site conditions.

Küba SF *blastfreezer*


from the GEA Küba Blue Line production range

Optimal air volume flows

- Optimal air volume flow for shock freezing: Forced-draft fans guide the air flow horizontally through the heat exchanger. This creates maximum air velocity over refrigerated goods exposed to the air flow.
- Height-adjustable floor brackets: for perfect adjustment to on site conditions.
- High air circulation rate with indirect air flow over the refrigerated goods: This ensures good economy, retention of produce quality and reaching the core temperature of the produce in the shortest possible time.

Excellent GEA Küba quality

- Excellent GEA Küba quality: with HFE® tube/fin system and CAL® refrigerant distributor
- Hinged drip tray on both sides: standard
- Correspondingly large fin spacing guarantees quick cooling: this results in a long service life of the evaporator.

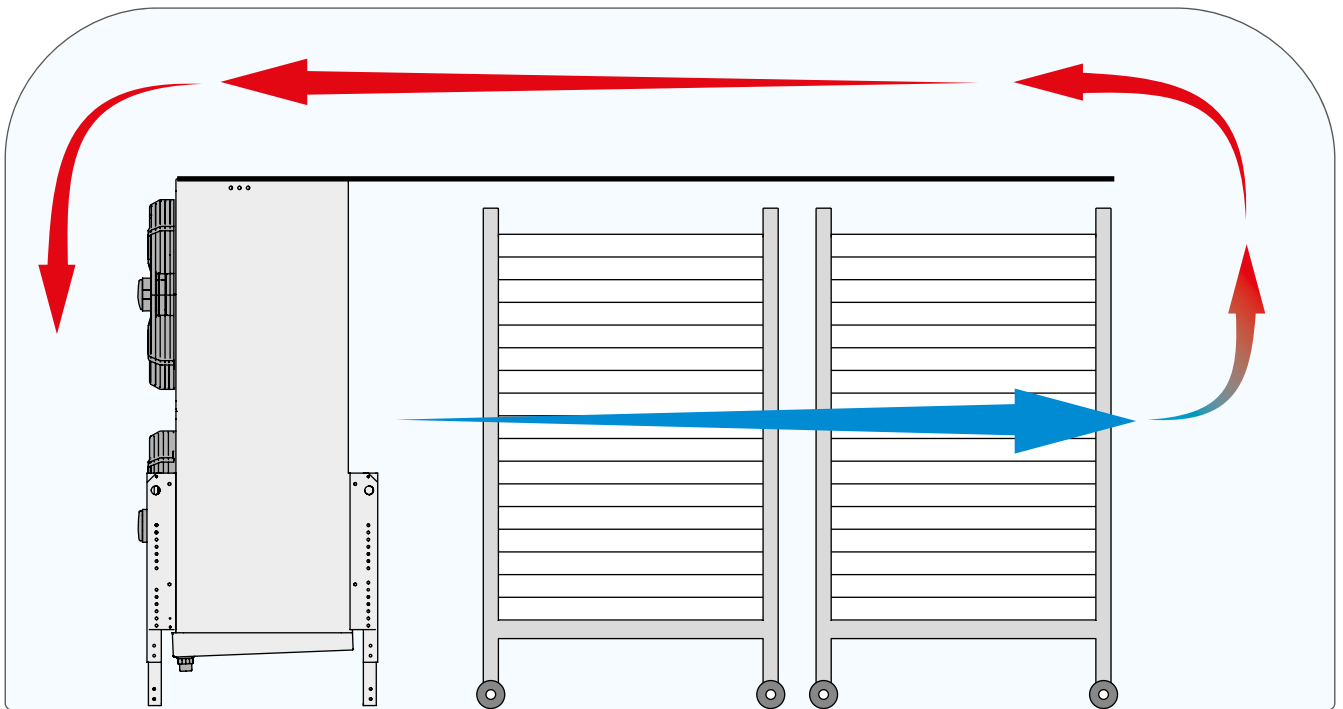

More powerful motors: Version V 1.60

- Even more flow optimised through precise coordination of fans and heat exchangers
 - Improved distribution of air in the heat exchanger
 - Integrated full bell mouth
 - ErP 2015 compliant
 - Significantly improved energy efficiency
- Low installation depth of approx. 200 mm
- The electrical power consumption has been reduced considerably.
- The saved electrical energy is not absorbed by the evaporator. It contributes to the increase in actual cooling power.
- Swivelling fan system (available as a variant)
 - Increased stability when opening
 - Increased opening angle
 - Only three screws to remove before opening


Küba SF *blastfreezer*

Basic version



Casing

- Smooth Sendzimir galvanised steel
- High-grade powder coating RAL 9018 papyrus white
- Food-safe
- Best quality powder coated edges
- Easy to clean
- Hinged drip tray
- Stainless steel mounting material
- Plastic drain
- Floor mounting brackets are adjustable on both sides, from 25 mm increments to 150 mm increments

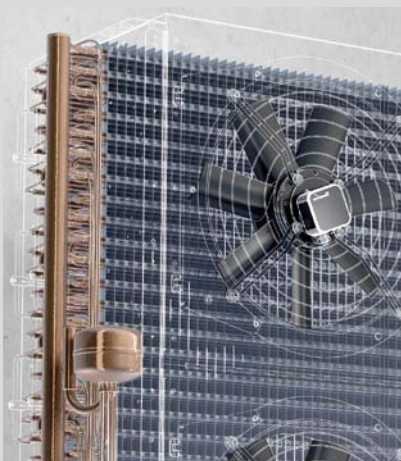

Heat exchanger for direct expansion

- Heat exchanger with aligned tube pattern; internally grooved special copper tubes (drawn oxygen-free), according to DIN EN 12735-1,2; diameter: 15 mm; with closed pure-aluminum HFE® fins
- Fin spacing:
B = 7 mm | K = 10 mm | L = 12 mm
- Fins flared to form-fit the core tube
- Highly effective heat transfer and compact design
- Küba-CAL® refrigerant distributors for multiple injections



Electric defrost


- Heaters with CrNi steel sleeve
- Vapour-tight connections
- Mains voltage: 230 V-1/400V-3-Y
- Wired ready to connect in junction boxes
- Optimized tubular heater configurations ensure fast and even defrosting
- Fins flared to form-fit the core tube
- Aluminium heat pipes that ensure excellent heat transfer to the fins and thus effective defrosting cycles with optimized service life.
- Integrated tube bushings allow a subsequent modification to an electric defrost system.



Fans

- Fan diameters available:
560 mm
 - Permissible motor operating temperatures:
50°C bis +60°C (50 Hz)
-50°C bis +40°C (60 Hz)
 - With built-in protector to be connected on site
 - 400 ±10% V-3~, 50/60 Hz
 - Protection class IP54
 - Insulation class F
 - Standard: 50 Pa external pressure
 - Version V1.60: 100 Pa external pressure
 - Operating data can be found with Küba Select or in the technical data
 - Hinged fan unit available as a variant
 - Controller:

	Standard	V1.60
Phase control	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Transformer	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Delta/star	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Frequency converter	<input type="checkbox"/>	<input checked="" type="checkbox"/>
- Please observe the manufacturer's information!

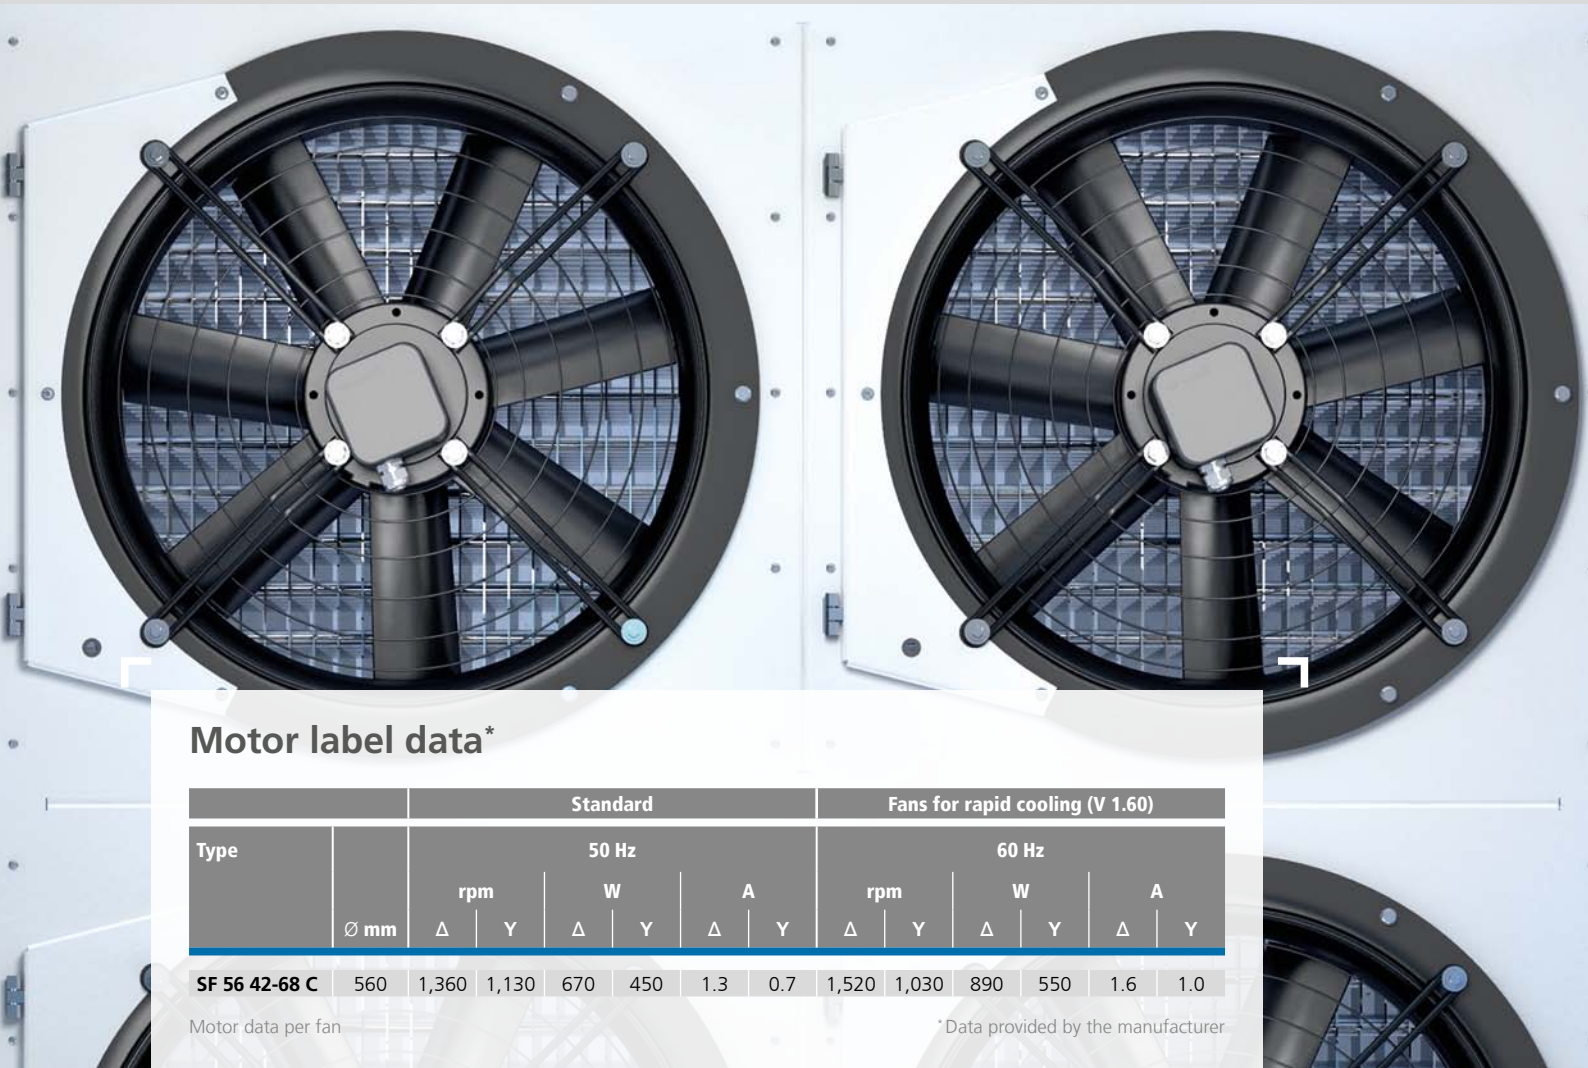

Motor label data *

Type	Ø mm	Standard						Fans for rapid cooling (V 1.60)					
		50 Hz						60 Hz					
		rpm		W		A		rpm		W		A	
		Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y
SF 56 42-68 C	560	1,360	1,130	670	450	1.3	0.7	1,520	1,030	890	550	1.6	1.0

Motor data per fan

*Data provided by the manufacturer

Küba SF blastfreezer

Technical data (Standard) – SFB(E)



7 mm

Type	Rating Q ₀ at 50 Hz, DT1, R404A		Cooling surface	Air flow	Air speed	Tube volume	Connections		Sound	Fans (Operational values at 50 Hz)					
	SC3	SC4					Inlet	Outlet		L _{WA}	Blade	Current	Per Fan		
	kW	kW											Ø mm	Ø mm	db (A)
2 SFB 56-F42 C	14.0	11.3	77.2	13,000	2.8	20.1	15x1.0	35x1.5	89	560	400 V-3	1,360	710	1.41	
SFB 56-F62 C	18.0	14.5	115.4	12,320	2.7	30.0	22x1.0	42x1.5	89	560	400 V-3	1,360	710	1.41	
4 SFB 56-F44 C	28.1	22.6	154.4	26,000	2.8	38.0	22x1.0	42x1.5	92	560	400 V-3	1,360	710	1.41	
SFB 56-F64 C	36.0	29.0	230.8	24,640	2.7	57.3	28x1.5	54x2.0	92	560	400 V-3	1,360	710	1.41	
6 SFB 56-F66 C	53.8	43.3	346.2	36,960	2.7	81.8	2 x 22x1.0	2 x 42x1.5	95	560	400 V-3	1,360	710	1.41	
8 SFB 56-F68 C	70.3	56.8	461.6	49,280	2.7	109.2	2 x 22x1.0	2 x 54x2.0	98	560	400 V-3	1,360	710	1.41	

Subject to modification.

Küba SF blastfreezer

Technical data (Standard) – SFK(E)



10 mm

Type	Rating Q ₀ at 50 Hz, DT1, R404A		Cooling surface	Air flow	Air speed	Tube volume	Connections		Sound	Fans (Operational values at 50 Hz)					
	SC3	SC4					Inlet	Outlet		L _{WA}	Blade	Current	Per Fan		
	kW	kW											Ø mm	Ø mm	db (A)
2 SFK 56-F42 C	11.7	9.4	55.6	13,300	2.9	20.1	15x1.0	35x1.5	89	560	400 V-3	1,360	710	1.41	
SFK 56-F62 C	15.7	12.7	83.1	13,060	2.8	30.0	22x1.0	42x1.5	89	560	400 V-3	1,360	710	1.41	
4 SFK 56-F44 C	23.5	18.9	111.2	26,600	2.9	38.0	22x1.0	42x1.5	92	560	400 V-3	1,360	710	1.41	
SFK 56-F64 C	31.6	25.4	166.2	26,120	2.8	57.3	28x1.5	54x2.0	92	560	400 V-3	1,360	710	1.41	
6 SFK 56-F66 C	47.1	38.0	249.3	39,180	2.8	81.8	2 x 22x1.0	2 x 42x1.5	95	560	400 V-3	1,360	710	1.41	
8 SFK 56-F68 C	62.0	50.0	332.4	52,240	2.8	109.2	2 x 22x1.0	2 x 54x2.0	98	560	400 V-3	1,360	710	1.41	

Subject to modification.

Küba SF blastfreezer

Technical data (Standard) – SFL(E)



12 mm

Type	Rating Q ₀ at 50 Hz, DT1, R404A		Cooling surface	Air flow	Air speed	Tube volume	Connections		Sound	Fans (Operational values at 50 Hz)					
	SC3	SC4					Inlet	Outlet		L _{WA}	Blade	Current	Per Fan		
	kW	kW											Ø mm	Ø mm	db (A)
2 SFL 56-F42 C	10.3	8.3	47.2	13,520	2.9	20.1	15x1.0	35x1.5	89	560	400 V-3	1,360	710	1.41	
SFL 56-F62 C	14.0	11.3	70.5	13,260	2.9	30.0	22x1.0	42x1.5	89	560	400 V-3	1,360	710	1.41	
4 SFL 56-F44 C	20.7	16.6	94.4	27,040	2.9	38.0	22x1.0	42x1.5	92	560	400 V-3	1,360	710	1.41	
SFL 56-F64 C	28.1	22.6	141.1	26,520	2.9	57.3	28x1.5	54x2.0	92	560	400 V-3	1,360	710	1.41	
6 SFL 56-F66 C	42.0	33.9	211.6	39,780	2.9	81.8	2 x 22x1.0	2 x 42x1.5	95	560	400 V-3	1,360	710	1.41	
8 SFL 56-F68 C	55.4	44.7	282.2	53,040	2.9	109.2	2 x 22x1.0	2 x 54x2.0	98	560	400 V-3	1,360	710	1.41	

Subject to modification.

Standard condition	t ₁	t ₀	DT1	Correction factors	Refrigerant	NB3/SC3	NB4/SC4
NB3/SC3	-18	-25	7	for other refrigerants	R134a	0.91	-
NB4/SC4	-25	-31	6		R507	0.97	0.97
					R22	0.95	0.95

Küba SF *blastfreezer*

Technical data (V1.60) – SFB (E)



7 mm

Type	Rating Q ₀ at 50 Hz, DT1, R404A		Cooling surface	Air flow	Air speed	Tube volume	Connections		Sound	Fans (Operational values at 50 Hz)					
	SC3	SC4					Inlet	Outlet		L _{WA}	Blade	Current	Per Fan		
	kW	kW											Ø mm	Ø mm	db (A)
② SFB 56-F42 C	14.4	10.8	77.2	16,000	3.5	20.1	15x1.0	35x1.5	89	560	400 V-3	1,370	1,210	2.89	
SFB 56-F62 C	19.0	14.3	115.4	15,000	3.3	30.0	22x1.0	42x1.5	89	560	400 V-3	1,370	1,210	2.89	
④ SFB 56-F44 C	29.3	22.0	154.4	32,000	3.5	38.0	22x1.0	42x1.5	92	560	400 V-3	1,370	1,210	2.89	
SFB 56-F64 C	38.6	29.2	230.8	30,000	3.3	57.3	28x1.5	54x2.0	92	560	400 V-3	1,370	1,210	2.89	
⑥ SFB 56-F66 C	56.7	42.6	346.2	45,000	3.3	81.8	2 x 22x1.0	2 x 42x1.5	95	560	400 V-3	1,370	1,210	2.89	
⑧ SFB 56-F68 C	68.9	50.6	461.6	60,000	3.3	109.2	2 x 22x1.0	2 x 54x2.0	98	560	400 V-3	1,370	1,210	2.89	

Subject to modification.

Küba SF *blastfreezer*

Technical data (V1.60) – SFK (E)



10 mm

Type	Rating Q ₀ at 50 Hz, DT1, R404A		Cooling surface	Air flow	Air speed	Tube volume	Connections		Sound	Fans (Operational values at 50 Hz)					
	SC3	SC4					Inlet	Outlet		L _{WA}	Blade	Current	Per Fan		
	kW	kW											Ø mm	Ø mm	db (A)
② SFK 56-F42 C	12.7	9.6	55.6	17,080	3.7	20.1	15x1.0	35x1.5	89	560	400 V-3	1,370	1,210	2.89	
SFK 56-F62 C	17.1	12.9	83.1	16,140	3.5	30.0	22x1.0	42x1.5	89	560	400 V-3	1,370	1,210	2.89	
④ SFK 56-F44 C	25.8	19.4	111.2	34,160	3.7	38.0	22x1.0	42x1.5	92	560	400 V-3	1,370	1,210	2.89	
SFK 56-F64 C	34.6	26.3	166.2	32,280	3.5	57.3	28x1.5	54x2.0	92	560	400 V-3	1,370	1,210	2.89	
⑥ SFK 56-F66 C	51.0	38.6	249.3	48,420	3.5	81.8	2 x 22x1.0	2 x 42x1.5	95	560	400 V-3	1,370	1,210	2.89	
⑧ SFK 56-F68 C	63.1	46.8	332.4	64,560	3.5	109.2	2 x 22x1.0	2 x 54x2.0	98	560	400 V-3	1,370	1,210	2.89	

Subject to modification.

Küba SF *blastfreezer*

Technical data (V1.60) – SFL (E)



12 mm

Type	Rating Q ₀ at 50 Hz, DT1, R404A		Cooling surface	Air flow	Air speed	Tube volume	Connections		Sound	Fans (Operational values at 50 Hz)					
	SC3	SC4					Inlet	Outlet		L _{WA}	Blade	Current	Per Fan		
	kW	kW											Ø mm	Ø mm	db (A)
② SFL 56-F42 C	11.3	8.5	47.2	17,340	3.8	20.1	15x1.0	35x1.5	89	560	400 V-3	1,370	1,210	2.89	
SFL 56-F62 C	15.5	11.7	70.5	16,540	3.6	30.0	22x1.0	42x1.5	89	560	400 V-3	1,370	1,210	2.89	
④ SFL 56-F44 C	22.9	17.3	94.4	34,680	3.8	38.0	22x1.0	42x1.5	92	560	400 V-3	1,370	1,210	2.89	
SFL 56-F64 C	31.2	23.8	141.1	33,080	3.6	57.3	28x1.5	54x2.0	92	560	400 V-3	1,370	1,210	2.89	
⑥ SFL 56-F66 C	46.1	35.0	211.6	49,620	3.6	81.8	2 x 22x1.0	2 x 42x1.5	95	560	400 V-3	1,370	1,210	2.89	
⑧ SFL 56-F68 C	57.8	43.2	282.2	66,160	3.6	109.2	2 x 22x1.0	2 x 54x2.0	98	560	400 V-3	1,370	1,210	2.89	

Subject to modification.


Standard condition	t _{li}	t _o	DT1	Correction factors for other refrigerants	Refrigerant	NB3/SC3	NB4/SC4
NB3/SC3	-18	-25	7		R134a	0.91	-
NB4/SC4	-25	-31	6		R507	0.97	0.97
					R22	0.95	0.95

Küba SF blastfreezer

Dimensions, weights, electric defrost, drain

Type	Dimensions												Drain
	H _{min}	H _{max}	B	T	T _(V1.60)	L	E ₁	E ₂	E ₃	W _{min}	W _{min (V1.60)}	W _{min (V3.10)}	D
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	inch
② SF 56-42 C	1,813	1,963	1,210	836	805	755	854	-	-	400	400	650	G 1¼
SF 56-62 C	1,813	1,963	1,210	836	805	755	854	-	-	400	400	650	G 1¼
④ SF 56-44 C	1,813	1,963	2,010	836	805	755	1,654	-	-	400	400	650	G 1¼
SF 56-64 C	1,813	1,963	2,010	836	805	755	1,654	-	-	400	400	650	G 1¼
⑥ SF 56-66 C	1,813	1,963	2,810	836	805	755	2,454	800	-	400	400	650	G 1¼
⑧ SF 56-68 C	1,813	1,963	3,610	836	805	755	3,254	800	2,400	400	400	650	G 1¼







Type	Electrical defrost 230 V-1 / 400 V-3-Y				Weights (net)			Weights (gross)		
	Coil	Tray	Total	Circuits	SFB	SFK	SFL	SFB	SFK	SFL
	kW	kW	kW	n	kg	kg	kg	kg	kg	kg
② SF 56-42 C	8.6	1.7	10.3	3	168	163	159	204	199	195
SF 56-62 C	12.9	1.7	14.6	3	200	192	187	236	228	223
④ SF 56-44 C	14.4	2.9	17.2	3	287	276	269	339	328	321
SF 56-64 C	21.5	2.9	24.4	3	346	330	320	398	382	372
⑥ SF 56-66 C	30.0	4.0	34.0	3	497	473	457	569	545	529
⑧ SF 56-68 C	40.8	5.2	46.0	3	669	637	616	761	729	708

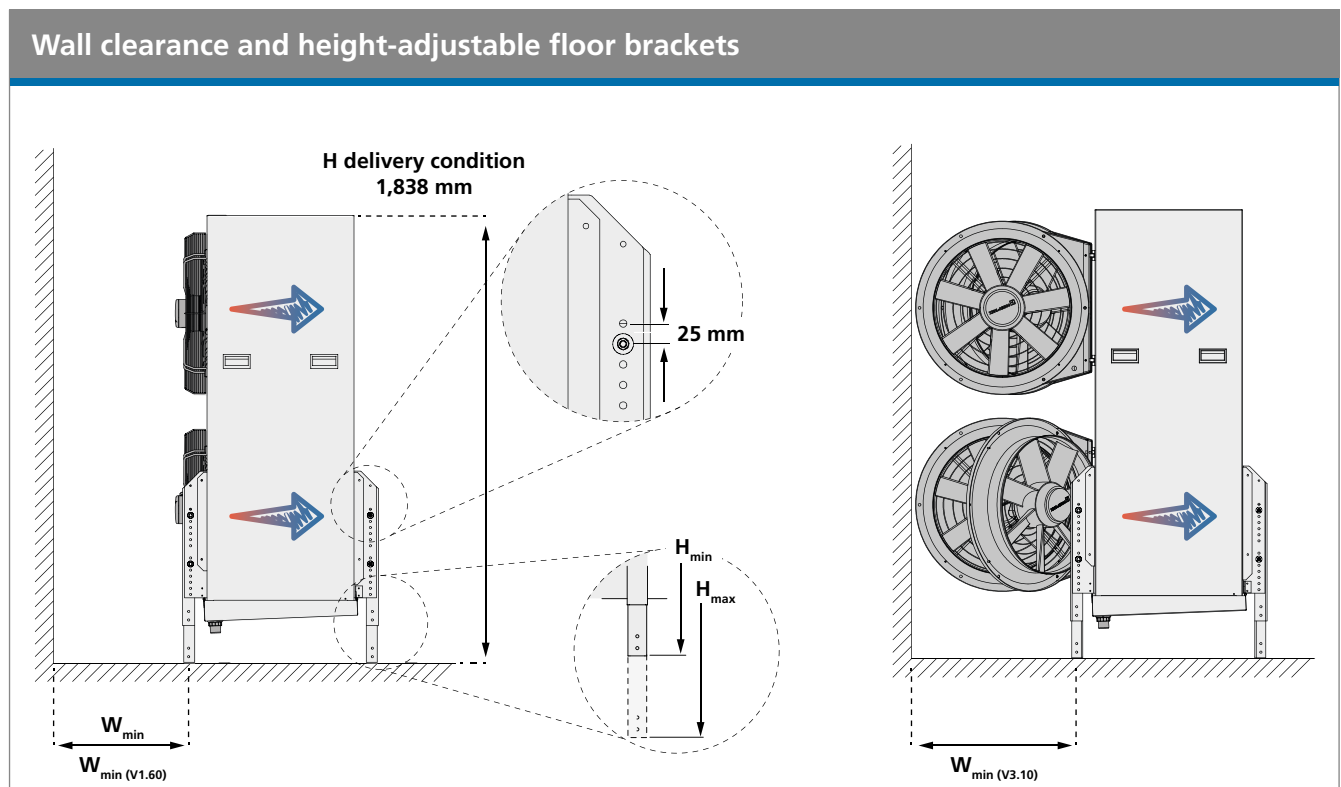

Küba SF *blastfreezer*

Dimensional drawings

Dimensional drawings Küba SF *blastfreezer* (2-8 motors)

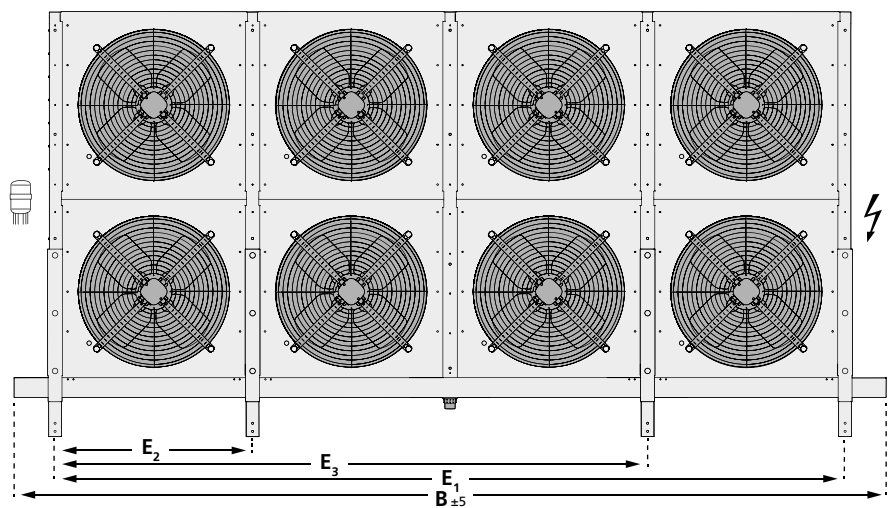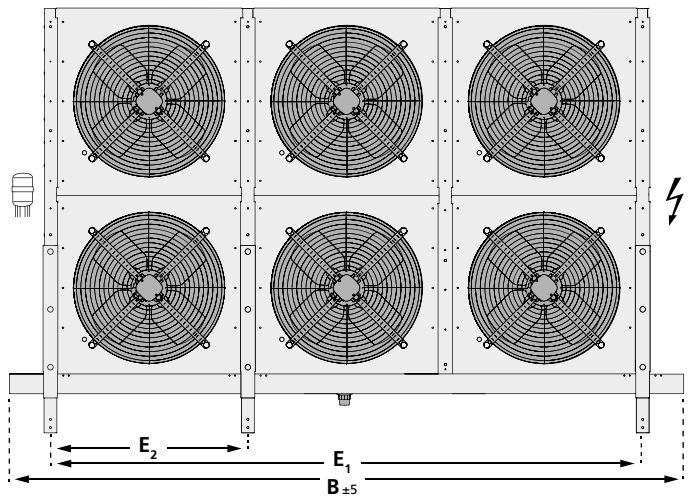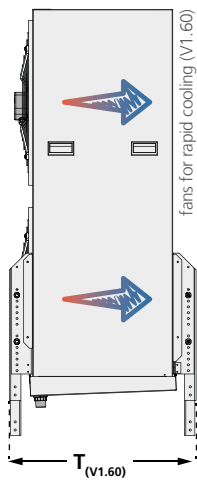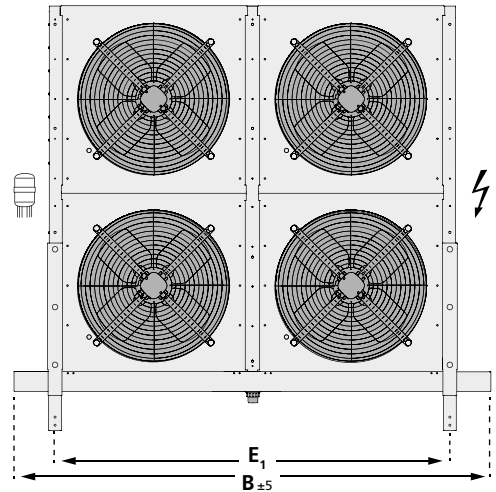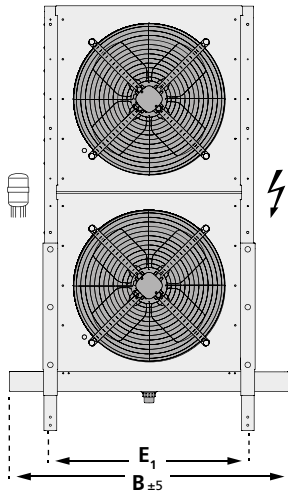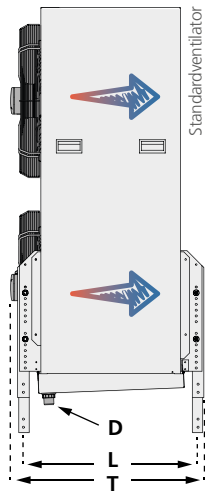

Küba SF *blastfreezer*

Variants

Motor-Variants

V1.60 Fans for rapid cooling

Fans for high external pressure (100 Pa)
400 V±10% V-3

Construction-Variants

V3.10 Fans hinged

For easy cleaning of the units, the fans swivel on stainless steel hinges.

Protection against corrosion

V3.12 Stainless steel casing

Special protection from salts (no chlorine) and organic acids in the cold room air

V6.01 Corrosion protection 1

Tubing: Copper (NH₃ units = stainless steel)
Fins: Aluminum, epoxy-resin-coated
End plates: Aluminum protective coating
Casing: Aluminum/zinc coated steel,
protective coating on both sides

V6.02 Corrosion protection 2

Tubing: Stainless steel (V2A)
Fins: Aluminum, epoxy-resin-coated
End plates: Stainless steel
Casing: Aluminum/zinc coated steel,
protective coating on both sides
Stainless steel CAL[®] distributor upon request

V6.03 Corrosion protection 3

Tubing: Stainless steel (V2A)
Fins: Aluminum
End plates: Aluminum
Casing: Aluminum/zinc coated steel,
protective coating on on one side
Stainless steel CAL[®] distributor upon request

V6.04 Corrosion protection 4

Tubing: Copper (NH₃ units = stainless steel)
Fins: Aluminum, epoxy-resin-coated
End plates: Aluminum
Casing: Aluminum/zinc coated steel,
protective coating on on one side

CO₂-Variants

V7.45 CO₂-Direct expansion

up to 45 bar operating pressure


V7.60 CO₂-Direct expansion

up to 60 bar operating pressure

Side cover hoods

Construction:

- Sendzimir galvanised steel
- High-grade powder coating, papyrus white RAL 9018
- The cover hoods can be used with all models.

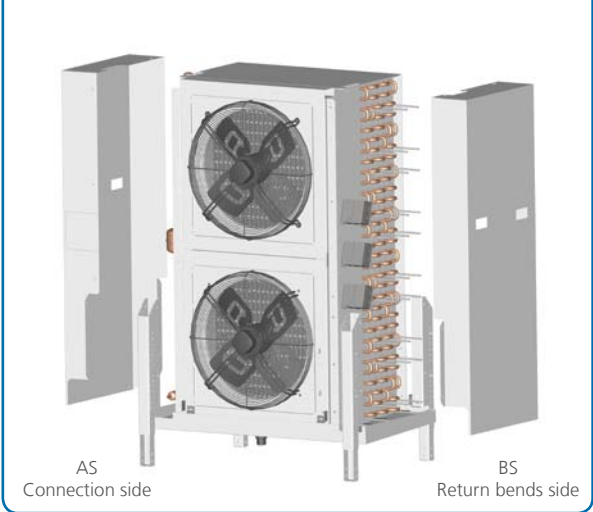



We live our values.

Excellence • Passion • Integrity • Responsibility • GEA-versity

GEA Group is a global engineering company with multi-billion euro sales and operations in more than 50 countries. Founded in 1881, the company is one of the largest providers of innovative equipment and process technology. GEA Group is listed in the STOXX® Europe 600 index.

GEA Heat Exchangers

GEA Küba GmbH

Kühler Weg 1 · 82065 Baierbrunn · Germany

Tel.: ++49(0)89/744 73-0 · Fax: ++49(0)89/744 73-107

kueba@gea.com · www.kueba.com